


# Lightweight flexible series

Greatly reduce the weight of the product and reduce installation costs

# 100W

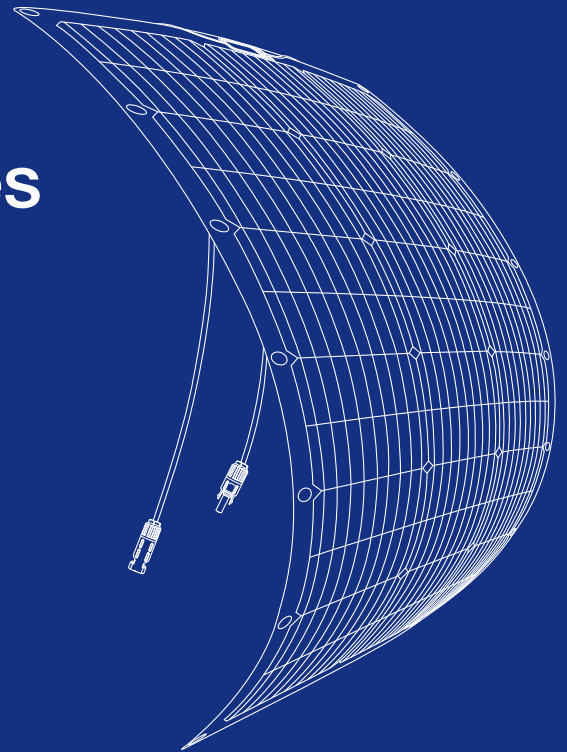

## • Main Features

- Lightweight, ultra-high flexibility, easy installation
- Fitting loss reduction for higher power
- Competitive Low Light Performance
- Reduces power loss by minimizing the effects of shadow occlusion
- Through strict weather resistance test, it proves its superior and reliable performance:
  - Dust, acid and alkali resistance, salt spray resistance
  - Anti-PID
  - Anti-hail impact


## • Quality System

ISO9001  
ISO14001  
ISO45001

## • Product Certificate



## • Product Guarantee

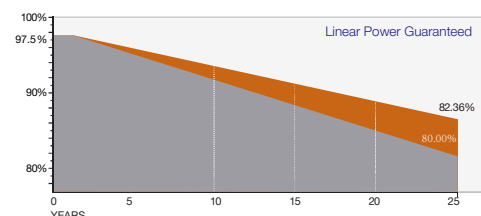

Tel / +86 131 3771 8313, +86 188 3741 8885  
E-Mail / info@ericcity.com  
Web / www.ericcity.com

©2023 Ericcity. All rights reserved. Specifications subject to technical changes. Version number.2023/7

### Electrical Performance Parameters

Specification	ER100FSP-1
Nominal Power ( $P_{m0}$ )	100W
Voc ( $V_{oc}$ )	23.76V
Isc ( $I_{sc}$ )	5.55A
Vmp ( $V_{mp}$ )	19.8V
Imp ( $I_{mp}$ )	5.05A
Efficiency ( $\eta_p$ )	20.5%
Tolerance	0~+3W

STC:AM=1.5, Irradiation:1000W/m<sup>2</sup>, Temperature:25°C

### Structural Properties



Dimension	1058mm*542mm
Thickness	2.5mm
Weight	2.25kg
Solar panel cell	Mono166*83mm, 36pcs (3*12)
Junction box	IP68 (3 bypass diodes), MC4 compatible connectors
Output conductor	44.0mm <sup>2</sup> (IEC) Conductor length: (+)250mm, (-)350mm, conductor length can be customized

### Temperature Property

Maximum power temperature coefficient	-0.35 %/°C
Open circuit voltage temperature coefficient	-0.26 %/°C
Short circuit current temperature coefficient	+0.047 %/°C
Operating temperature	-40 ~ +85 °C
Module Nominal Operating Temperature (NMOT)	44 ± 2 °C

### Temperature Property


Container	Pcs/Box	No. of Box	Pcs of 40HQ Container
40HQ	45pcs	24	1080pcs

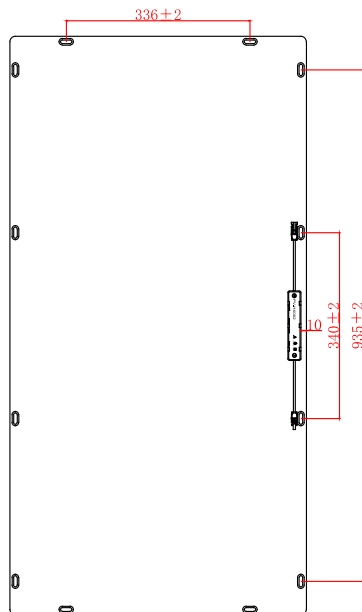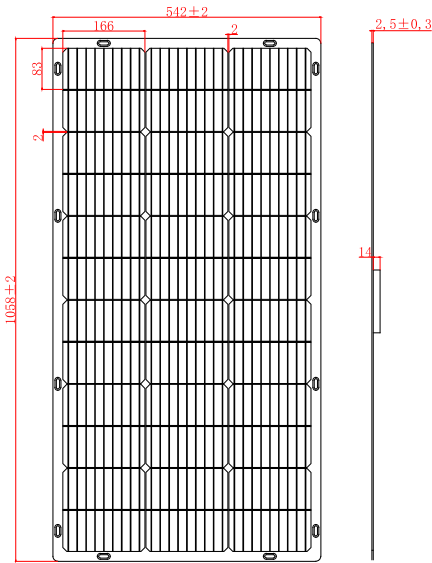

# Lightweight flexible series

Greatly reduce the weight of the product and reduce installation costs

# 200W

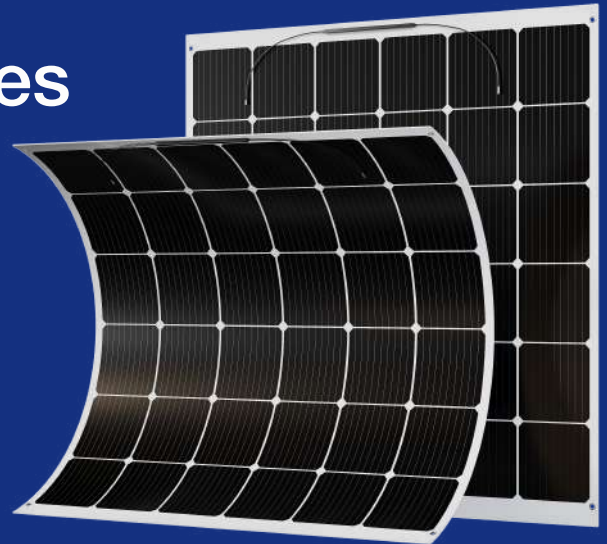

## • Main Features

- Lightweight, ultra-high flexibility, easy installation
- Fitting loss reduction for higher power
- Competitive Low Light Performance
- Reduces power loss by minimizing the effects of shadow occlusion
- Through strict weather resistance test, it proves its superior and reliable performance:
  - Dust, acid and alkali resistance, salt spray resistance
  - Anti-PID
  - Anti-hail impact


## • Quality System

ISO9001  
ISO14001  
ISO45001

## • Product Certificate




## • Product Guarantee

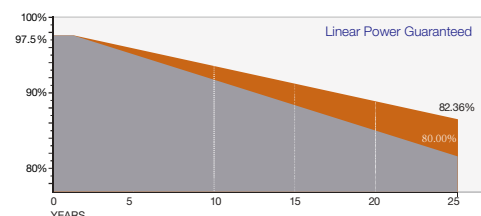

Tel / +86 131 3771 8313, +86 188 3741 8885  
E-Mail / info@ericcity.com  
Web / www.ericcity.com

©2023 Ericcity. All rights reserved. Specifications subject to technical changes. Version number.2023/7

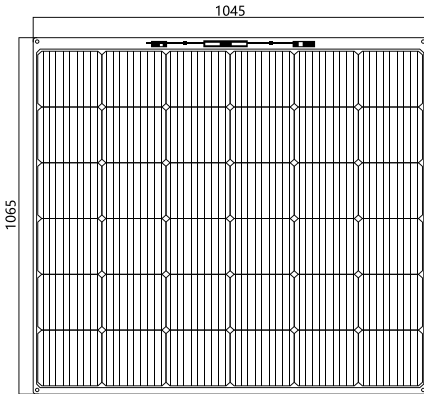

### Electrical Performance Parameters

Specification	ER200FSP-1
Nominal Power ( $P_{mp}$ )	200W
Voc ( $V_{oc}$ )	23.76V
Isc ( $I_{sc}$ )	11.11A
Vmp ( $V_{mp}$ )	19.8V
Imp ( $I_{mp}$ )	10.1A
Efficiency ( $\eta_p$ )	21.6%
Tolerance	0~+5W
Maximum system voltage	1500V DC
Wind/snow pressure	2400mpa/5400mpa

STC:AM=1.5, Irradiation:1000W/m<sup>2</sup>, Temperature:25°C

### Structural Properties

Dimension	1065mm*1045mm
Thickness	3mm
Weight	3.8kg
Solar panel cell	Mono166*166mm, 36pcs (6*6)
Junction box	IP68 (3 bypass diodes), MC4 compatible connectors
Output conductor	44.0mm <sup>2</sup> (IEC) Conductor length: (+)250mm, (-)350mm, conductor length can be customized

### Temperature Property

Maximum power temperature coefficient	-0.35 %/°C
Open circuit voltage temperature coefficient	-0.26 %/°C
Short circuit current temperature coefficient	+0.047 %/°C
Operating temperature	-40 ~ +85 °C
Module Nominal Operating Temperature (NMOT)	44 ± 2 °C

### Temperature Property

Container	Pcs/Box	No. of Box	Pcs of 40HQ Container
40HQ	50pcs	40	2000pcs

